Parabolic antenna JRMD - 1200 -10/11

www.jirous.com

Antenna JRMD – 1200 – 10/11 is designed for microwave links at the frequency band 10 and 11 GHz. The new generation is coming in a deep reflector dish design with a massive holder.

Electrical parameters:

Frequency range	10.0 – 12.0 GHz
Gain – Low frequency	39.5 ± 1 dBi
Gain – High frequency	40.5 ± 1 dBi
Front to back ratio	≥ 60.5 dB
XPD	≥ 37 dB
Beamwidth$_{-3\ dB}$	1.5°
Return loss	≥ 16 dB$_{/10.3 - 11.7\ GHz}$
Polarization	Linear, vertical/horizontal
Electrical Compliance	US FCC Part 101A | 10.550 – 10.680 GHz US FCC **Part 101B** | 10.7 – 11.7 GHz **Class 2** ETSI EN 302-217-4-2

Mechanical parameters:

Parabola	Ø 1200 mm , aluminium alloy
Radom	UV steady plastic ABS
Input / output	Circle waveguide Ø 19 mm
Installation for mast	ø 80 - 120 mm ø 60 - 80 mm – with wind bracing set
Operating wind load	
- without wind bracing set	110 km/h (68 mph)
- with wind bracing set	140 km/h (87 mph)
Survival wind load	210 km/h (130 mph)
Weight of antenna	28.5 kg (63 lbs.)
Shipping dimensions – 1 pc	1300 x 800 x 1430 mm / 66 kg (146 lbs)
Shipping dimensions – 2 pcs	1300 x 1100 x 1430 mm / 101 kg (223 lbs)

Parabolic antenna JRMD - 1200 -10/11

Usage:

The antenna is supplied together with a massive holder that allows easy mounting on a mast. Holder can be installed separately on the mast. Subsequently, the antenna with microwave unit can be simply hung up into it.

Antenna holder allows fine setting elevation ± 15°and azimuth ± 7°. Ready for right and left side mounting.


In the areas with the expected occurrence of the strong winds the usage of the (adjustable) wind bracing set is recommended. For mounting on the **mast ø 60 – 80 mm the usage of the (adjustable) wind bracing set** is strongly recommended.


The usage of adjustable wind bracing set allows to set azimuth more comfortably.

The **wind bracing set** or the **adjustable wind bracing set** are optional accessories.


Parabolic antenna JRMD – 1200 –10/11


Measurement of radiation pattern:

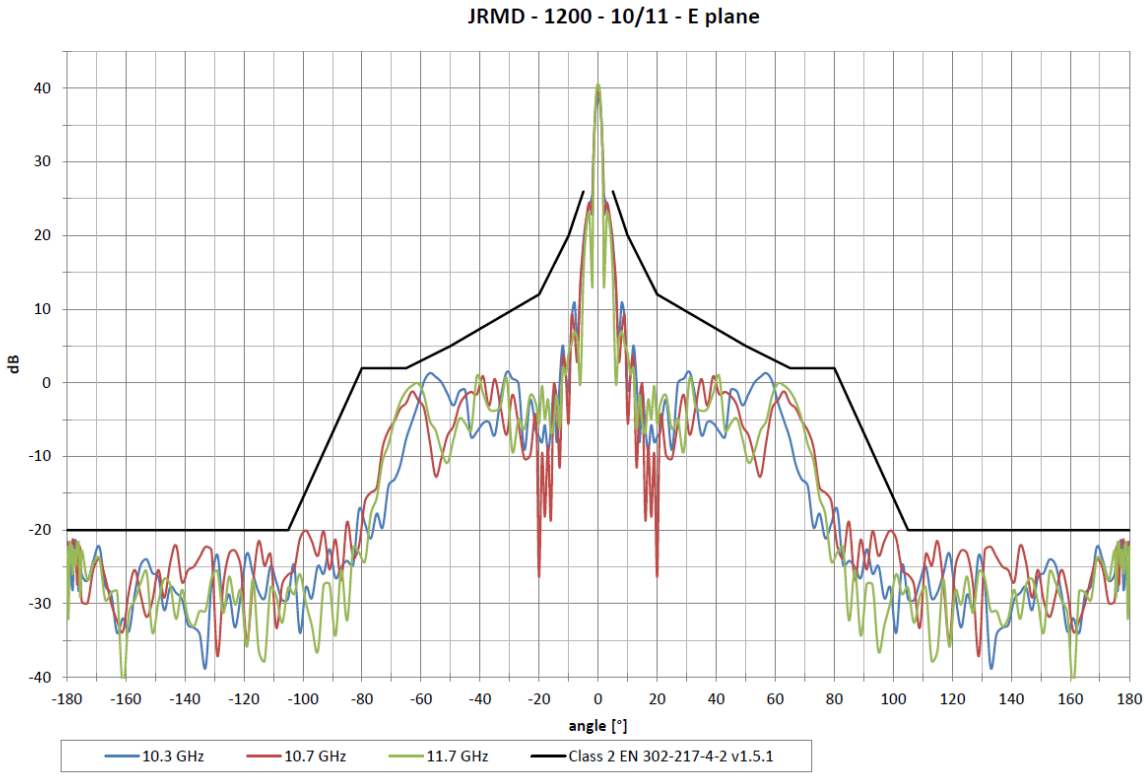

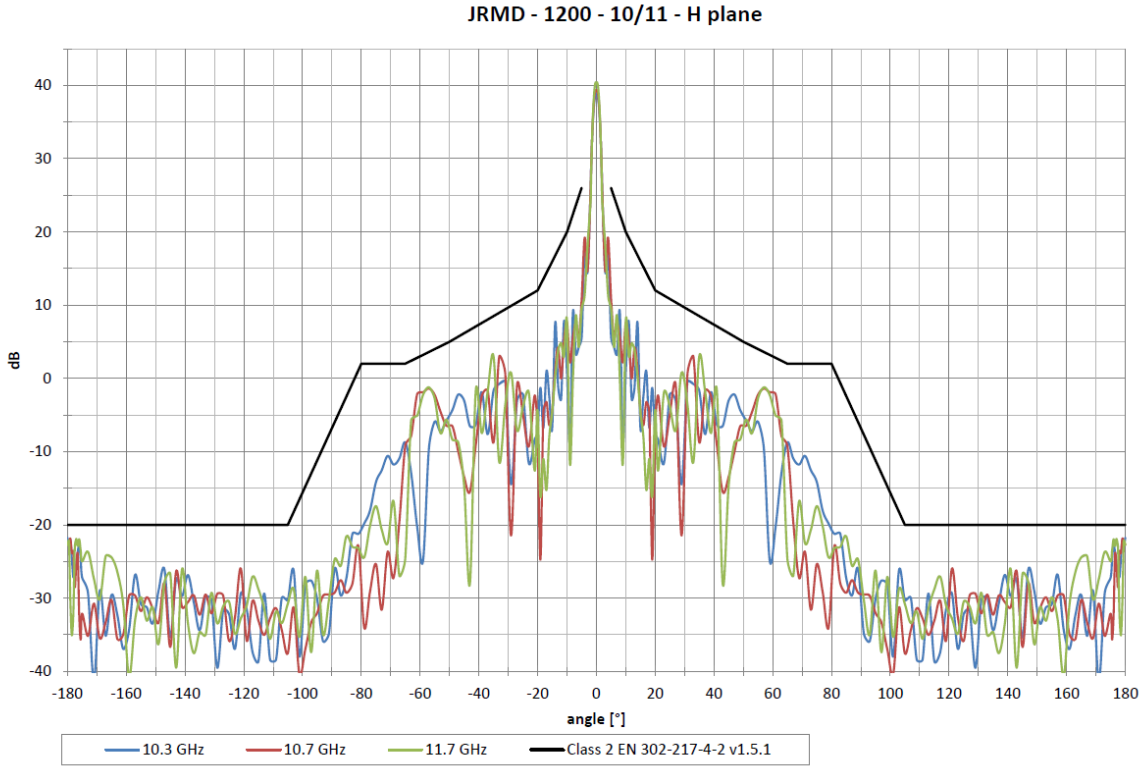

Parabolic antenna JRMD – 1200 –10/11

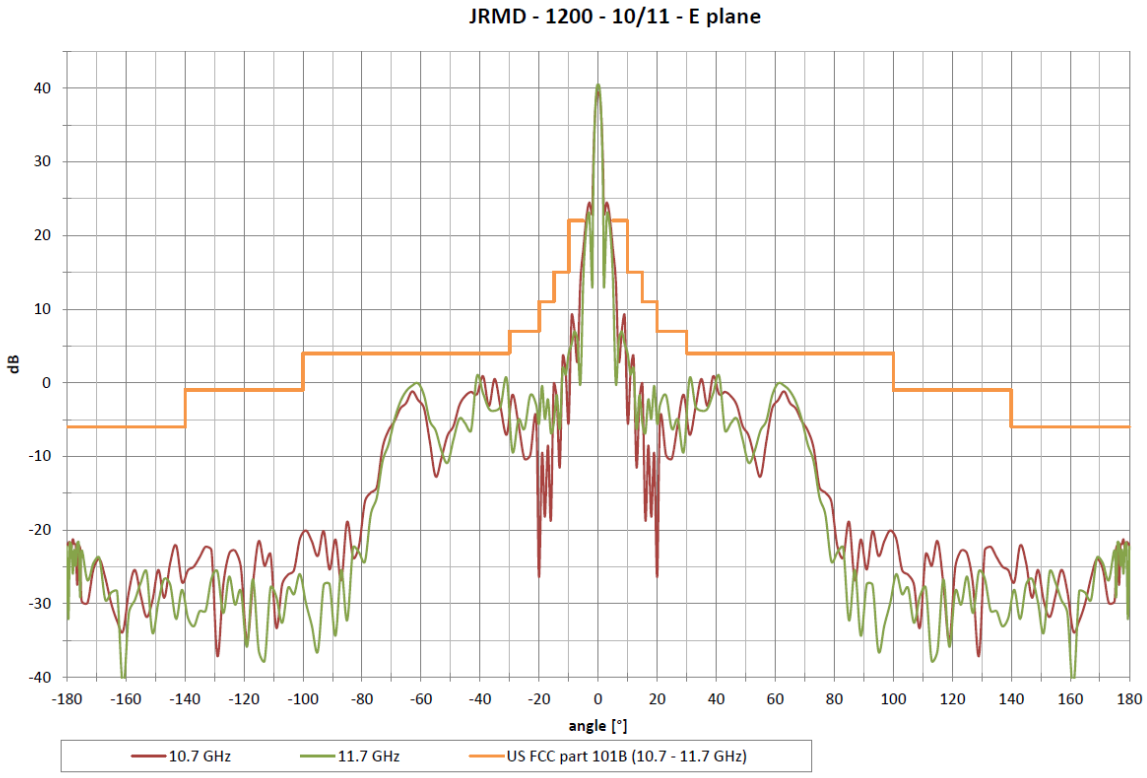


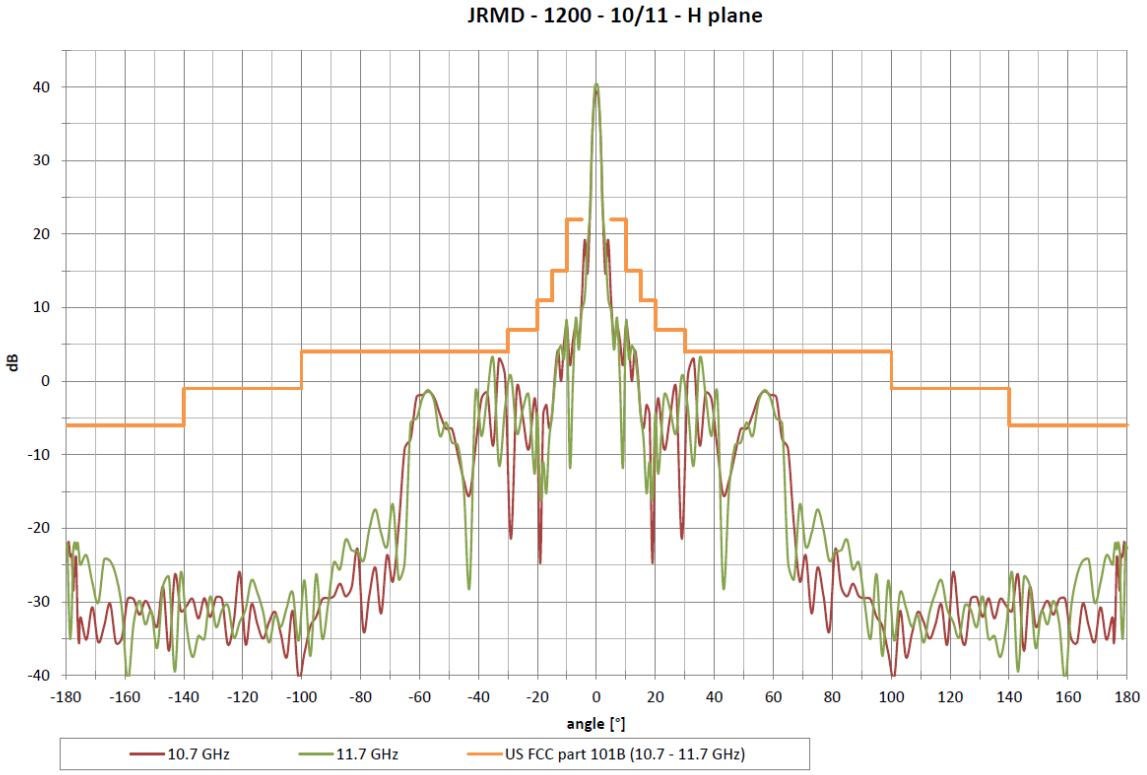


Parabolic antenna JRMD – 1200 –10/11


www.jirous.com

Outline:

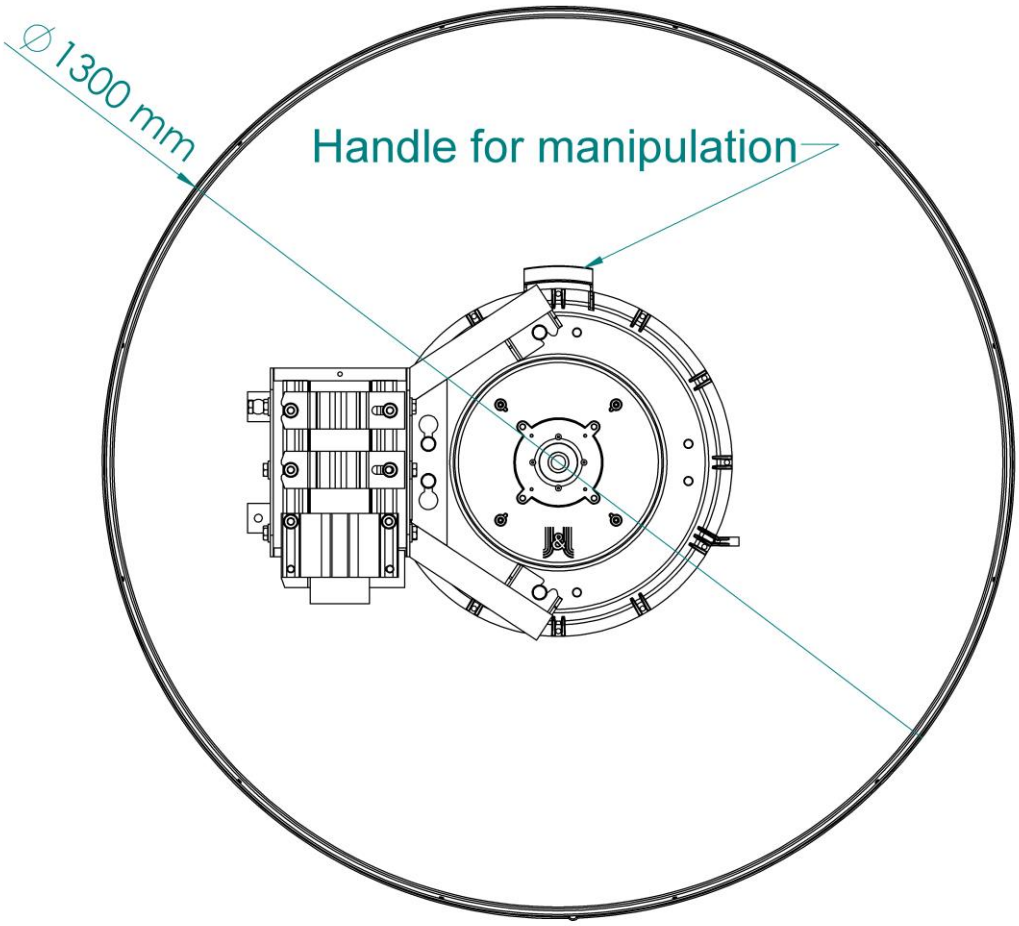


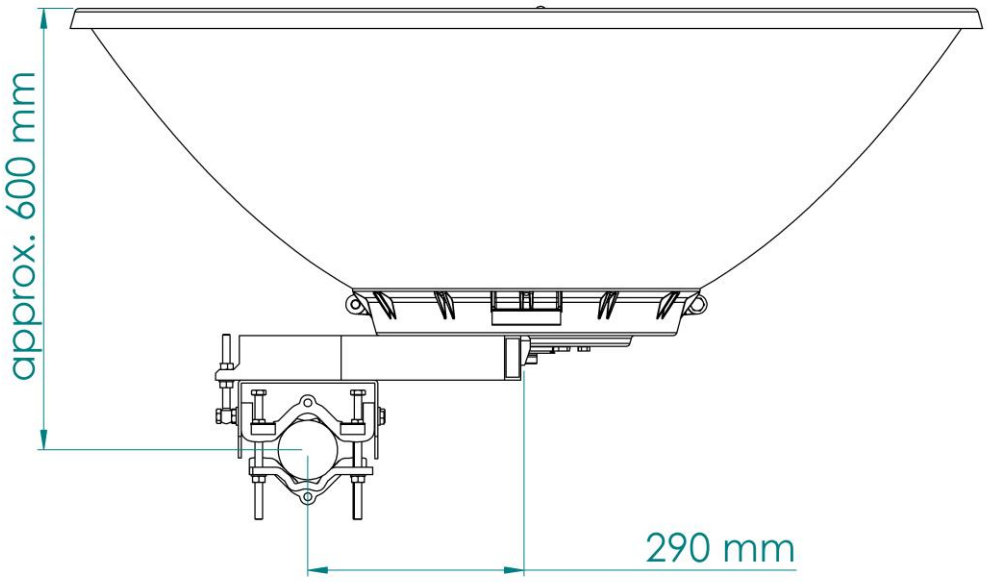

Parabolic antenna JRMD – 1200 –10/11

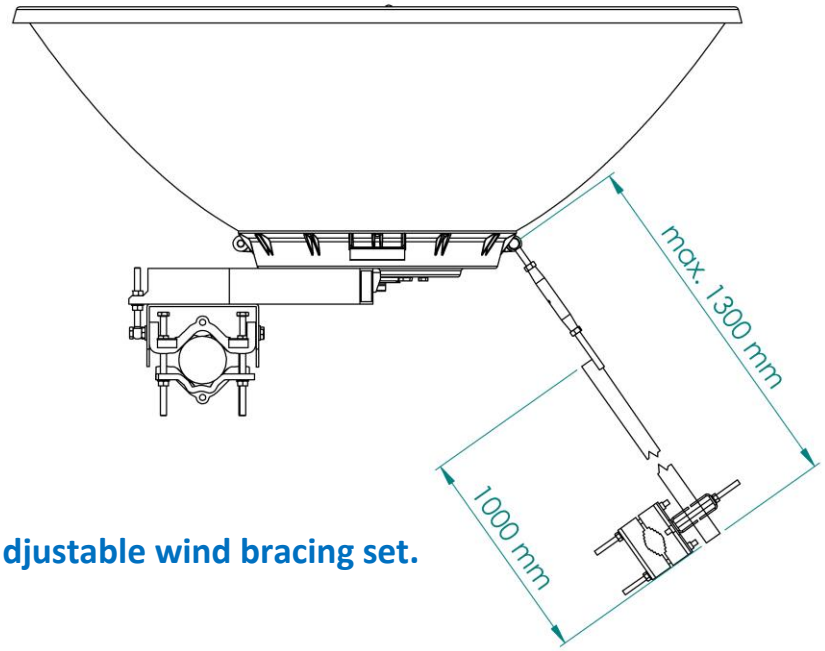


Antenna with adjustable wind bracing set.

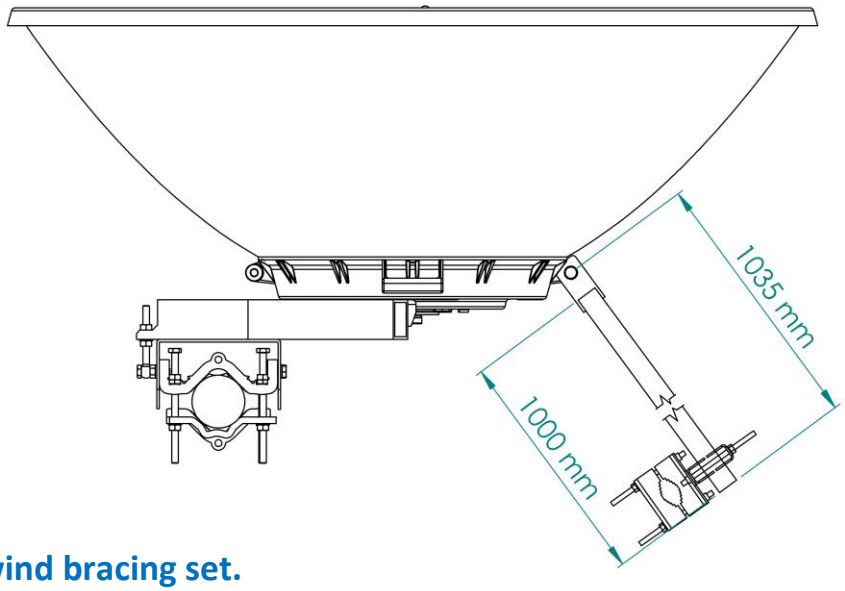

Antenna with wind bracing set.

Wind loading:

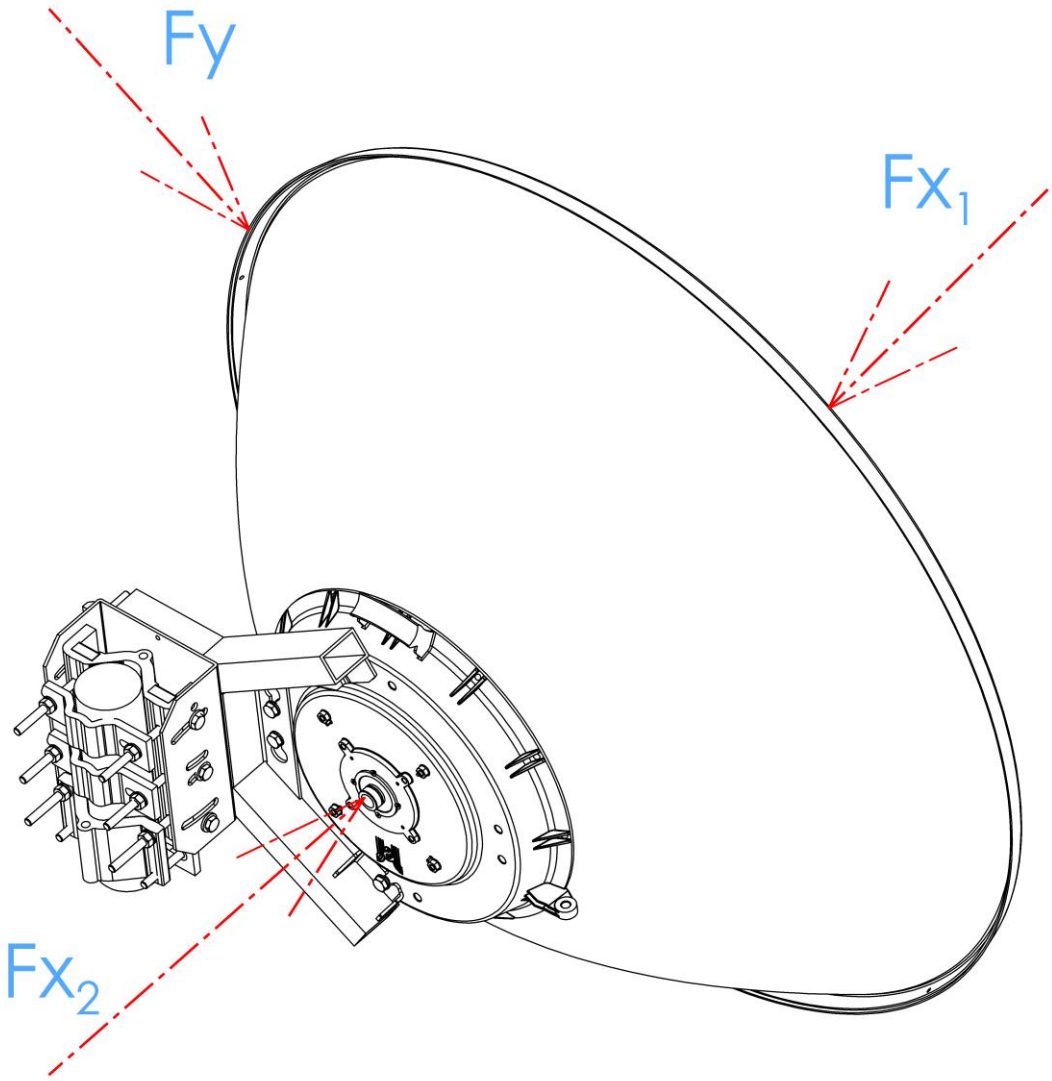

Wind Loading at 200 km/h [125 mph]

Direction	Force [N]	Force [lbf]
Fx_1	2696	606
Fx_2	2186	491.4
Fy	247	55.5