Parabolic antenna JRMC-900-4.7

www.jirous.com

Antenna JRMC-900-4.7 is designed for microwave links at the frequency band 4.7 GHz. Precise performance with deep reflector dish complies with standard ETSI class 3.

Electrical parameters:

Frequency range	4.4 – 5.0 GHz
Gain – Low frequency	29.5 ± 1 dBi
Gain – High frequency	30.5 ± 1 dBi
Front to back ratio	≥ 55 dB
Beamwidth$_{-3\ dB}$	5.0°
Return loss	≥ 14 dB
Polarization	Dual - vertical and horizontal Fine setting ±5°
Cross-Polarization	≥ 32 dB
Electrical Compliance	**Class 3** ETSI EN 302-217-4-2

Mechanical parameters:

Parabola	Ø 900 mm , Aluminium alloy
Radome	UV steady plastic ABS
Connectors	2x N-female 50Ω
Installation for mast	Ø 40 - 120 mm
Operating wind load	140 km/h
Survival wind load	210 km/h
Weight of antenna	10.3 kg (22.7 lbs.)
of holder	3.2 kg (7 lbs.)
Shipping dimensions	1000 x 990 x 430 mm / 19.3 kg (42.5 lbs.)

Parabolic antenna JRMC-900-4.7


www.jirous.com


Usage:

- deep parabola for better parameters
- **easy to assembly:** first the holder and then the antenna only by 2 screws
- **fine setting** elevation (of gradient) and azimuth ± 20°
- extreme wind stability

The antenna is supplied with a holder that allows easy mounting on a mast. The holder can be installed separately on the mast. Subsequently, you can simply hang up the antenna with microwave unit into it. The holder allows precise adjustment in both directions. Ready for right and left side mounting.
In the areas with the expected occurrence of the strong winds mounting on the mast with minimal ø 70 mm is recommended.

Measurement of radiation pattern:

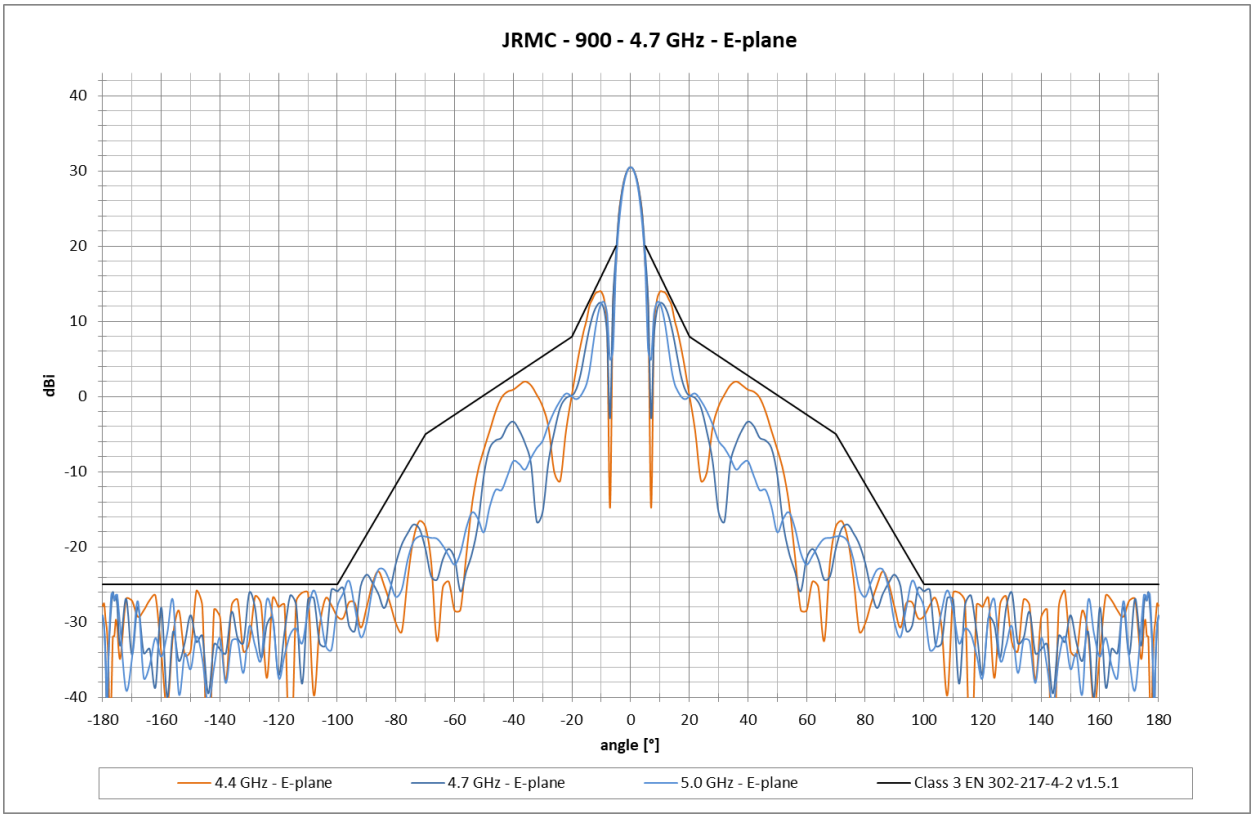


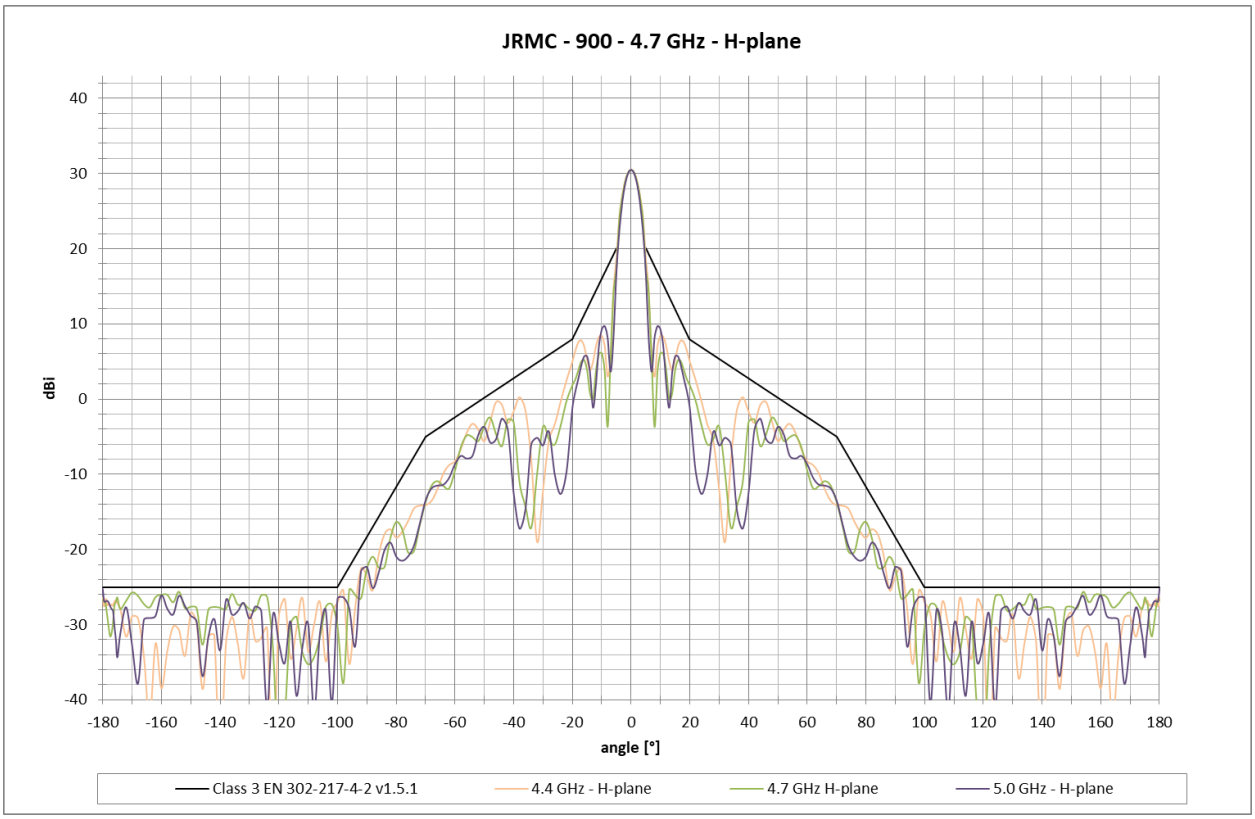


Parabolic antenna JRMC-900-4.7


www.jirous.com

Outline:

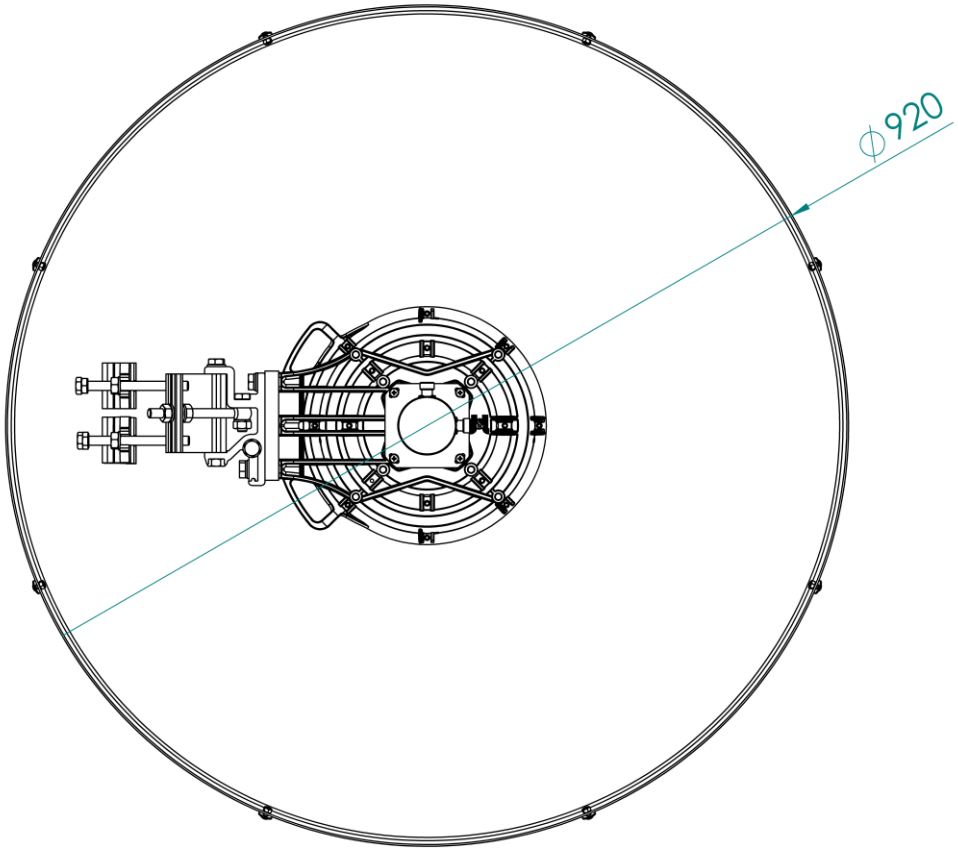

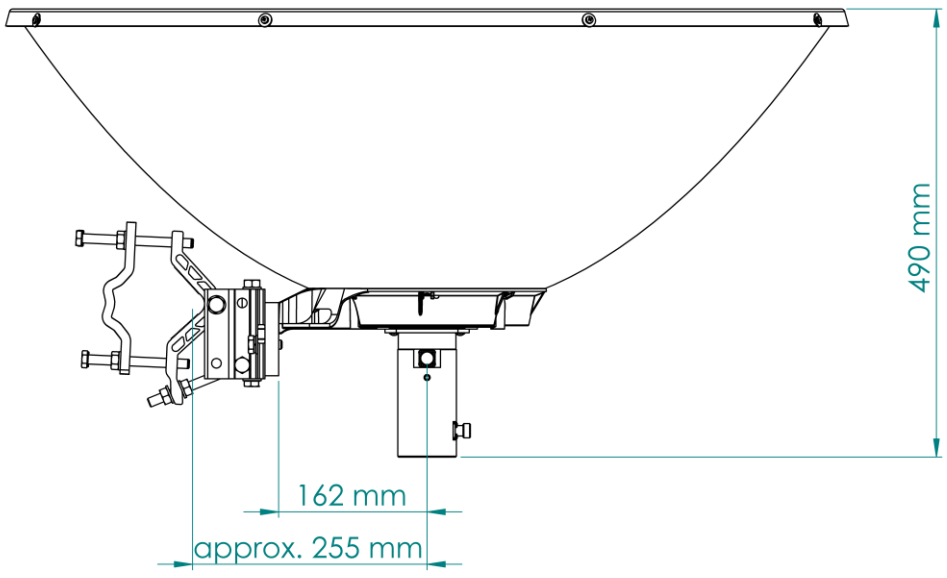

Wind loading:

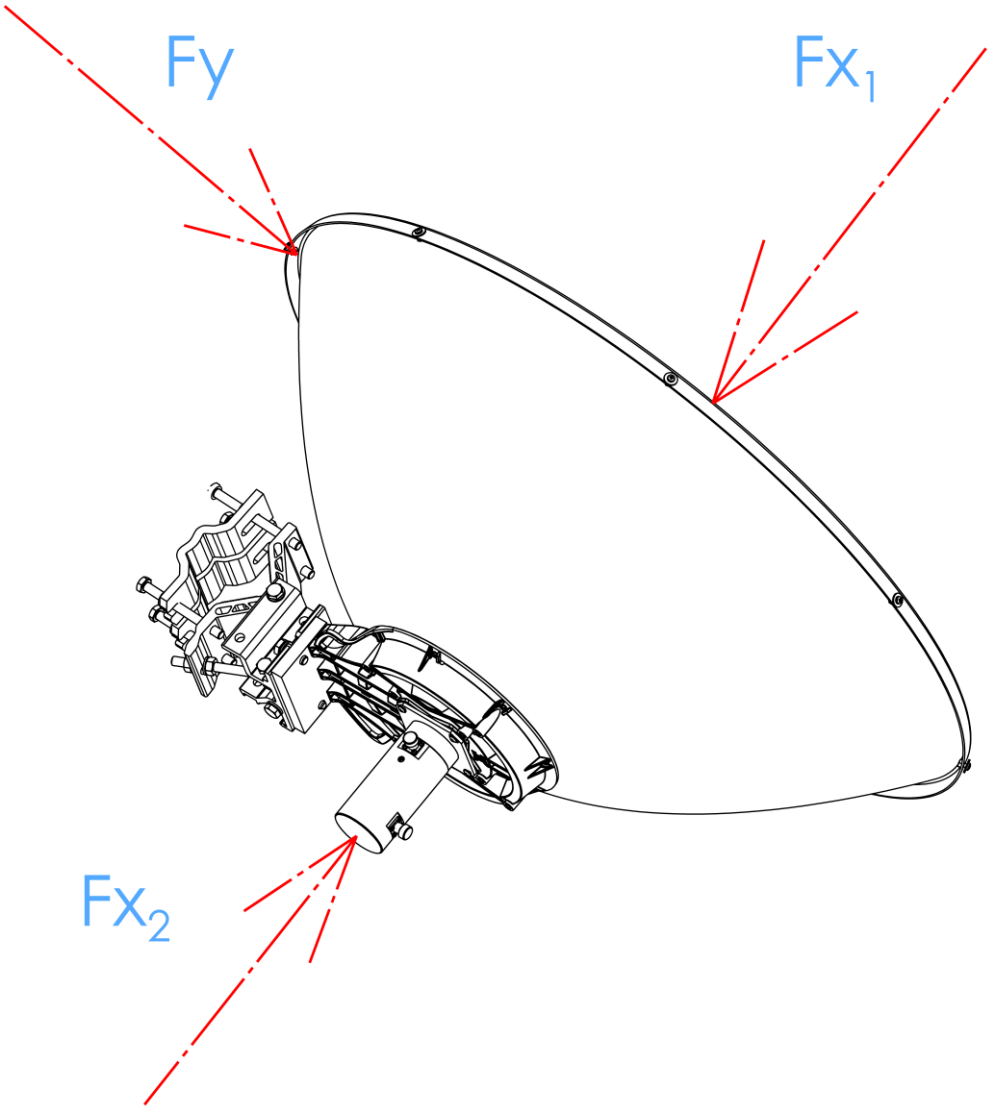

Wind Loading at 200 km/h [125 mph]

Direction	Force [N]	Force [lbf]
Fx_1	1443	324,4
Fx_2	1324	297,4
Fy	91	20,4